

## WT-N11 V1.00


### Motion sensor speaker



#### 1. Product features

- Small and exquisite, with excellent sound quality.
- 4 levels of volume.
- Micro USB interface.
- Human body induction, the induction distance up to 4 meters.
- Standard 32Mbit SPI-flash, available to replace capacity according to customer requirements.
- Support to copy the audio files from USB disk

##### 1.1: Interface

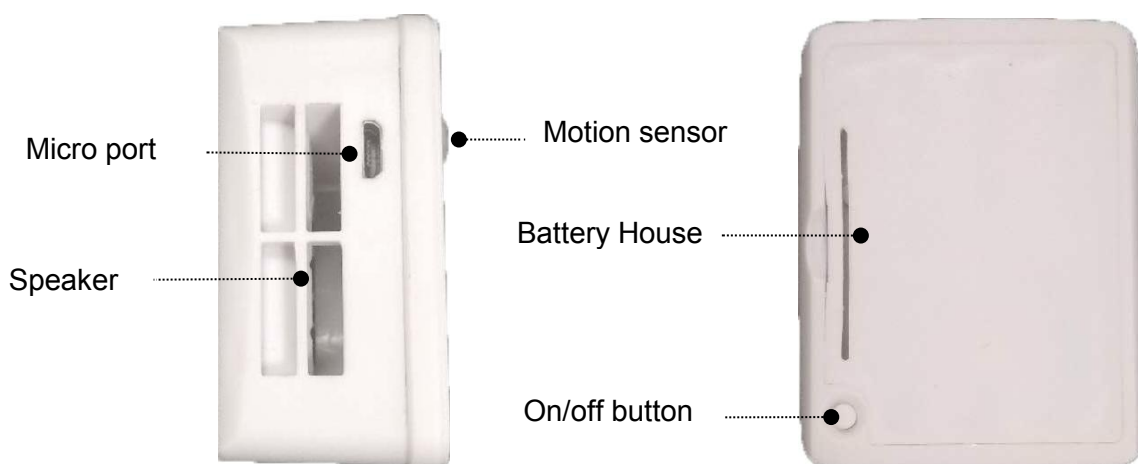

## 2. Electrical parameters:


Power supply	Micro USB 5V/1A	
	7 x AAA Batteries	
Working Current	Sleep standby mode	≤35uA
	Playing mode	≤230mA
Audio Format	BIN	
Speaker	8Ω/0.5W	
Volume level	≥80dB	

## 3. Basic function


### 3.1: On/off button

Button	Operation	Function
On/off button	Longer press	On/off
	Short press	Adjust volume level
	Double press	Change sound file

### 3.2: Change Audio File

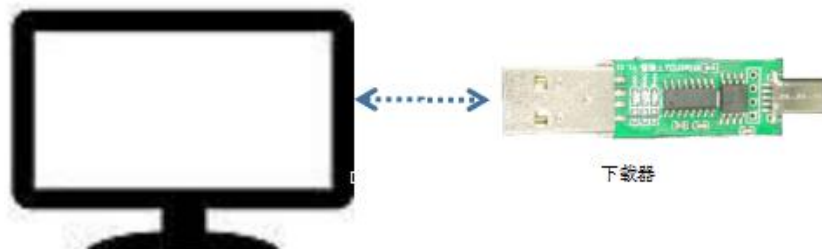

1: Put audio file in to a specific upload tool

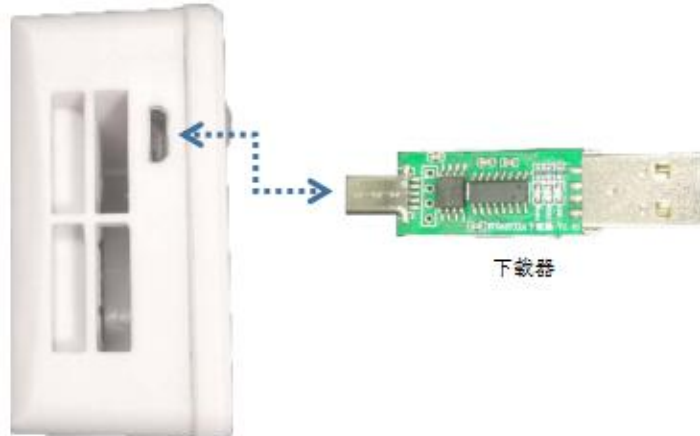

2: Plug upload tool into micro usb port, audio file will upload automatically (indicated light flash fast when uploading , indicated light stay on when finish uploading ).

#### 4.Install environment and attentions

- 1、 If environment temperature higher than 33℃ , will affect motion sensor working!
- 2、 Do not install product near Air conditional ,Fans etc

#### 5.FAQ

Question	Answer
How to make the battery lift longer	1: lower the volume level 2: External power supply
What is the battery life of 3xAAA batteries	Around one month

#### 6.Accessories

Name	Number
Main device	1
Velcro	2

### Indemnification

SHENZHEN WAYTRONIC ELECTRONIC CO.,LTD. reserves the right to modify and use information without prior notice to customers. New product specifications will be subject to the latest version

## Contact Us

### Shenzhen Waytronic Electronics Co., Ltd.

Tel: +86-755-29605099

Fax : +86-755-29606626

Website: [en.waytronic.com](http://en.waytronic.com)

E-mail: [WT1999@waytronic.com](mailto:WT1999@waytronic.com)

Add:4/F,Building No.11,Fuan Robotics Industrial Park, Fuyong,Baoan District,Shenzhen ,518103,Guangdong ,China